

# Urban Local Air Quality Management Framework for Non-Attainment Areas in Indian Cities

Sunil Gulia<sup>1</sup>, S. M. Shiva Nagendra<sup>2</sup>, Jo Barnes<sup>3</sup>, Mukesh Khare<sup>4\*</sup>

<sup>1</sup> Former Senior Project Scientist, Civil Engineering Department, Indian Institute of Technology Delhi, Hauz Khas, New Delhi, India (sunilevs@gmail.com)

<sup>2</sup> Associate Professor, Civil Engineering Department, Indian Institute of Technology Madras, Chennai, India (shivnagendra@yahoo.com)

<sup>3</sup> Senior Research Fellow, AQMRC, University of West of England, UK (Jo.Barnes@uwe.ac.uk)

<sup>4</sup> Professor, Civil Engineering Department, Indian Institute of Technology Delhi, Hauz Khas, New Delhi, India

\*Corresponding Author:

Address: Room No.220, Civil Engineering Department, Block –IV, Indian Institute of Technology Delhi, Hauz Khas, New Delhi-110016, India

E-mail address: kharemukesh@yahoo.co.in

Tel.: +91-11-26591212; Fax: +91-11- 26581117.

## Abstract

Increasing urban air pollution level in Indian cities is one of the major concerns for policy makers due to its impact on public health. The growth in population and increase in associated motorised road transport demand is one of the major causes of increasing air pollution in most urban areas along with other sources e.g., road dust, construction dust, biomass burning etc. The present study documents the development of an urban local air quality management (ULAQM) framework at *urban hotspots* (non-attainment area) and a pathway for the flow of information from goal setting to policy making. The ULAQM also includes assessment and management of air pollution *episodic* conditions at these hotspots, which currently available city/ regional-scale air quality management plans do not address. The prediction of *extreme* pollutant concentrations using a hybrid model differentiates the ULAQM from other existing air quality management plans. The developed ULAQM framework has been applied and validated at one of the busiest traffic intersections in Delhi and Chennai cities. Various scenarios have been tested targeting the effective reductions in elevated levels of NO<sub>x</sub> and PM<sub>2.5</sub> concentrations. The results indicate that a developed ULAQM framework is capable of providing an evidence-based graded action to reduce ambient pollution levels within the specified standard level at pre-identified locations. The ULAQM framework methodology is generalised and therefore can be applied to other non-attainment areas of the country.

**Keywords:** Urban local air quality management framework, non-attainment area, vehicular pollution, episodic condition, hybrid model.

44 1. Introduction

45 Urban air pollution (UAP) is a major concern in most megacities (with population > 10 million)  
46 around the world. The pollution level exceeds the national and international ambient as well as  
47 health- based air quality standards (Gurjar et al., 2008; Marlier et al., 2016). The growth in urban  
48 population and associated increased volume of motorised traffic in cities are majorly responsible  
49 for severe air pollution (MoPNG, 2003; Badami, 2005; Molina et al., 2007; Singh et al., 2007;  
50 Wang et al., 2010; Kumar et al., 2017). The sudden rise in vehicle exhaust emissions during *peak*  
51 traffic period results into extreme air pollution events (episodes) at *urban hotspots* (Chelani, 2013;  
52 Pant et al., 2015; Cakmak et al., 2016). Urban hotspot is the location in the city where air pollution  
53 level are already fails or likely to fails to meet national ambient air quality standards (NAAQS)  
54 due to high source activities or adverse meteorological condition or both. Mostly, the central  
55 business districts, busy traffic intersections and heavy trafficked congested roadways convert in to  
56 urban hotspot (Gokhale and Khare, 2007; Kanlindkar, 2007; Tiwari *et al.*, 2012). Due to the  
57 heterogeneous and unplanned growth of cities in developing countries, the movement of vehicles  
58 is non-uniform throughout the city, which results in high spatial variations in pollutant emissions  
59 leading to formation of urban *hotspots*. In addition, topographical and meteorological variations  
60 in urban areas lead to complex spatial and temporal variations in pollutant concentrations (Gokhale  
61 and Khare, 2007).

62  
63 Over the last few years, increasing air pollution in the mega and growing cities in India has become  
64 one of the major problems affecting the environment (Gurjar et al., 2016; Amann et al., 2017). Air  
65 pollution concentrations frequently exceed NAAQS especially during the winter season when  
66 atmospheric dispersion potential is very low (Guttikunda et al. 2014; Gulia et al., 2017a). In  
67 particular for Delhi city, increasing concentrations of particulate matter (PM) result in tens of  
68 thousands of premature deaths and six million asthma attacks each year (Guttikunda and Goel,  
69 2013; Lelieveld et al., 2015). Kesavachandran et al. (2015) have reported that those undertaking  
70 physical exercise outdoors at locations with higher PM<sub>2.5</sub> ( $\leq 2.5 \mu\text{m}$  in aerodynamic diameter)  
71 concentrations in Delhi are at a risk of lung function impairment. Further, Maji et al. (2016) have  
72 estimated that mortality attributable to PM<sub>10</sub> in Mumbai and Delhi has increased by ~1.6 and ~2.5  
73 times, respectively in year 2015 compared to year 1995. However, annual average mortality due  
74 to PM<sub>2.5</sub> in Mumbai and Delhi was reported 10,880 and 10,900, respectively in the year 2015. They  
75 also estimated that total economic cost increased from US\$ 2680.87 million to US\$ 4269.60  
76 million for Mumbai city and US\$ 2714.10 million to US\$ 6394.74 million for Delhi city from year  
77 1995 to year 2015 due to increased PM<sub>10</sub> concentrations. Therefore, there is a need to reduce air  
78 pollution exposure related health impacts which can be accomplished by controlling/managing the  
79 increasing urban air pollution loads through an efficient and effective integrated management plan.

80  
81 Current air quality management practices/action plans (AQMP) (CPCB, 2006; NILU, 2007;  
82 Sivertsen, 2008; Moussiopoulos et al., 2010) are useful at the city level but inadequate to address  
83 sudden rises in pollution at an urban hotspot or non-attainment area (NAA). Each NAA is unique  
84 in terms of spatial and temporal patterns of emission sources. Therefore, one of the essential  
85 requirements is the site specificity of an AQMP, which make it capable of effectively dealing with  
86 the complexity of atmospheric changes, topographical constraints and pollution sources at local  
87 scale. The concept of air quality management at a local level, as required by the Environment Act  
88 1995 in the United Kingdom (UK), is described by Longhurst et al. (1996) for notified air quality  
89 management areas. The researchers emphasise the importance of the role of relevant local

90 government departments, for air quality management at a local scale. Later, Beattie et al. (2002)  
91 have reviewed the working pattern of various local authorities in England and found gaps in joint  
92 working between departments within the authorities and with non- local government agencies  
93 impacted on the successful implementation of the local air quality management process. They also  
94 observed a lack of political will and funding for implementation of mitigation measures for air  
95 quality improvement. As a result, they suggested that effectiveness of particular measures should  
96 be evaluated not only based on scientific and economic parameters but also on public and political  
97 acceptability. In the UK, local air quality is still managed through an improved version of the Local  
98 Air Quality Management (LAQM) framework (DEFRA, 2016). Following the UK LAQM  
99 approach, Gokhale and Khare (2007) have also introduced the concept of an episodic urban air  
100 quality management framework to control CO pollution for Delhi city. However, this is currently  
101 a theoretical framework and not tested to evaluate the impacts of interventions. Recently, Li et al.,  
102 2017 suggested that air quality management strategies, including regional environmental  
103 coordination and collaboration, restrictive vehicle emission standards and promotion of public  
104 transport should strictly implement for improvement of urban air quality. They also reported that  
105 source apportionment based on high time resolution of trace element can be a powerful tool for  
106 local air quality management.

107  
108 The present study aims to formulate an urban local air quality management (ULAQM) framework  
109 to manage the *exceedences* of air pollution thresholds at specified locations in urban areas in Indian  
110 cities. Further, the developed framework has been tested theoretically to investigate its  
111 effectiveness in reducing NO<sub>x</sub> and PM<sub>2.5</sub> concentrations in Delhi and Chennai cities, respectively.

## 112 113 2. Status of vehicular air pollution in India

114 Motorised vehicles have emerged as one of the major contributors to increased levels of urban air  
115 pollution in India (Sharma & Dikshit, 2016; Kumar et al., 2017; Dhyani et al., 2017). The  
116 population of registered vehicles in India has increased from 67 million in 2003 to 210 million in  
117 2015 (MoRTH, 2017). Similar growth has been observed in fuel consumption. Based on 2012-13  
118 data, India's total diesel and petrol consumptions were 69.74 and 15.7 million tons, respectively  
119 with the transport sector accounting for about 70% of diesel and 99.6% of petrol consumption  
120 (MoPNG, 2013). In Indian metropolitan cities (Delhi, Mumbai, Kolkata, and Chennai), ambient  
121 PM concentrations frequently violate the NAAQS as well as WHO guideline thresholds (Gupta  
122 and Kumar, 2006; Singh et al., 2007; CPCB, 2010; Gupta et al., 2010). Ramachandra and  
123 Shwetmala (2009) have reported that India's transport sector emits 258.10 Tg of CO<sub>2</sub>, of which  
124 94.5% is due to motorised road transport. The Central Pollution Control Board (CPCB) Delhi has  
125 reported that vehicular emission contribution to the total urban air pollution in Delhi and Mumbai  
126 is about 76-90% for CO, 66-74 % for NO<sub>x</sub>, 5-12% for SO<sub>2</sub> and 3-12% for PM (CPCB, 2010a).  
127 In the recent past, Sharma and Dixit (2016) have estimated that approximately 12.9 Ton/day, 11.6  
128 Ton/day, 113.4 Ton/day, 1.2 Ton/day and 322.4 Ton/day of PM<sub>10</sub>, PM<sub>2.5</sub>, NO<sub>x</sub>, SO<sub>2</sub> and CO,  
129 respectively are emitted from in use road vehicles in Delhi city. This indicates that urban air  
130 quality in developing countries is deteriorating due to high vehicular activities and related  
131 inadequate management practices. The following sub-sections discuss the sources and other  
132 related air pollution issues in two Indian megacities, Delhi and Chennai cities (Sections 2.1 & 2.2)  
133 which have also been considered as case study examples in the application of the developed  
134 ULAQM.

135

## 136 2.1 Delhi city

137 Delhi city has a population of 16.8 million, which has grown at a decadal growth rate of 47%  
138 (Census, 2011) spread over an area of 1483 km<sup>2</sup> at average altitude of ~ 215 m above mean sea  
139 level. The city faces heavy seasonal climatic variability. For example, temperature varies from  
140 minimum of 4-5 °C during the winter (months of December - February) to maximum of 45-48 °C  
141 during the summer (months of March- May) (Perrino *et al.*, 2011). The winter season faces  
142 frequent ground based inversion conditions which restrict the dispersion of pollutants. Further,  
143 the monsoon season experiences more than 80% of the annual rainfall. Studies consistently show  
144 high PM<sub>10</sub> and PM<sub>2.5</sub> concentrations in the ambient air of Delhi, irrespective of location type  
145 (Mandal *et al.*, 2014; Pant *et al.*, 2015; Sharma *et al.*, 2013a; Tiwari *et al.*, 2014). In the recent  
146 past, studies have ranked Delhi as the "worst" polluted city based on an environment performance  
147 index (Hsu and Zomer, 2014). The current road length in Delhi city is 33,198 km with 864  
148 *signalized* and 418 *blinker* traffic intersections. The road network has increased from 28,508 km  
149 in 2000 to 33,198 km in 2015; while the number of vehicles has more than doubled from 3.37  
150 million in 2000 to 8.83 million in 2015 (GoD, 2016; NCR, 2013). However, vehicles population  
151 of 2.0 million in Mumbai and 3.7 million in Chennai were reported in year 2015 (Gupta, 2015).  
152 This increase has resulted in heavy traffic congestion and a reduction in vehicular speed on the  
153 roads leading to increased emissions of pollutants, such as, PM<sub>2.5</sub>, PM<sub>10</sub> ( $\leq 10 \mu\text{m}$ ) and NO<sub>x</sub>  
154 (oxides of nitrogen) (CPCB, 2010a; Dhyani *et al.*, 2017). Mohan and Kandya (2007) have  
155 analysed nine year's (1996-2004) data at seven different locations in Delhi city and created an Air  
156 Quality Index (AQI). They have reported that annual average NO<sub>2</sub> concentrations have been found  
157 in the range of 50-90  $\mu\text{g m}^{-3}$  during 1996 to 2004 at one ITO intersection. A summary of past  
158 studies between 1997 and 2016 is presented as supplementary information (SI) in Table S1, which  
159 indicates the concentrations of PM and gaseous pollutants in ambient air exceeded the NAAQS.

160

## 161 2.2 Chennai City

162 Chennai is one of the seventeen declared NAAs in India notified by CPCB. It has a population of  
163 7.08 million (Census, 2011) over a geographical area of 426 km<sup>2</sup>. The city is located on the  
164 Southeast coast of India at an average altitude of six metres above mean sea level. The city has  
165 four major seasons, namely, summer (April-June) and pre-monsoon (July-September) and  
166 monsoon (October-December) and winter (January– March). In summer, the city experiences  
167 humid weather and strong wind with the mean daily temperature reaching  $36 \pm 2^{\circ}\text{C}$ . It is  
168 characterised by *land* and *sea* breezes and frequent cyclonic storms. During winter, the ambient  
169 temperature reaches  $21 \pm 2^{\circ}\text{C}$ . The monsoon generates 90% of annual rainfall (Jayanthi and  
170 Krishnamoorthy, 2006). The vehicles population in Chennai city was reported around 3.7 million  
171 in year 2015 with highest vehicle density of 2093 per km road length when compared to other  
172 Indian cities (Gupta, 2015). Sivaramasundaram and Muthusubramanian (2010); Srimuruganandam  
173 and Nagendra, (2011) have found that PM levels exceed the NAAQS at selected urban locations  
174 in Chennai city where vehicular movement were found highest. Further, it is observed that diesel  
175 exhausts (43–52% in PM<sub>10</sub> and 44–65% in PM<sub>2.5</sub>) and gasoline exhausts (6–16% in PM<sub>10</sub> and 3–  
176 8% in PM<sub>2.5</sub>) are found to be the major source contributors at one of the kerb site in Chennai city  
177 (Srimuruganandam and Nagendra, 2012). Madala *et al.* (2016) have simulated the NO<sub>x</sub> level at  
178 seven different location in Chennai city using a lagrangian particle dispersion model (LPDM)

179 considering all point, area and line sources and found high seasonal variation in NO<sub>x</sub> concentration  
180 at all locations.

### 181 3.0 Urban air quality management in India

182 Policy makers in India started taking an interest in air pollution control policies after the Stockholm  
183 Conference on the Human Environment in year 1972 and identified that the nation was in need of  
184 environmental legislation to control air pollution. As a result, the Air (Prevention and Control of  
185 Pollution) Act 1981 came into force with the goal of prevention, control, and abatement of air  
186 pollution. It is a very comprehensive legislation and empowers Central and State Pollution Control  
187 Boards (SPCBs) to declare pollution control areas, to put restrictions on certain industrial units to  
188 limit their emissions of air pollutants and to enter, inspect and carrying out monitoring. In addition,  
189 CPCB provides technical assistance and guidance to the SPCBs and carry out and sponsor  
190 investigations and research related to air pollution. The first ambient air quality standards for three  
191 criteria pollutant (SO<sub>2</sub>, NO<sub>2</sub> and SPM) separately for *industrial*, *residential* and *sensitive* areas  
192 were adopted in year 1982 by the CPCB under this Act. The NAAQS were later revised in 1994  
193 with the addition of three more pollutants for daily and annual averages (except CO which is 8-  
194 hour average). The latest NAAQS were again revised in year 2009 for a total of 12 pollutants.

195 The national air monitoring program (NAMP) started in 1984 with seven stations in Agra and  
196 Anpara. However, at present, total 591 ambient air quality monitoring stations are operated in 248  
197 cities/towns in 28 states and four union territories, and the network is expanding rapidly with the  
198 inclusion of further continuous real time monitors (CPCB, 2015). Additionally, individual SPCBs  
199 operate their own monitoring stations. In recent years, the Ministry of Earth Sciences, Government  
200 of India (GoI) has started monitoring and forecasting air quality in four cities (Delhi, Mumbai,  
201 Pune and Ahmedabad) under the SAFAR program (IITM, 2017).

202 Emission reduction from vehicle's exhaust in India commenced from year 1990 with notification  
203 of mass emission norms at the manufacturing stage for new vehicles. The CPCB along with  
204 concerned SPCB has prepared city scale action plans for the selected seventeen cities to reduce  
205 urban air pollution following orders of Honorable Supreme Court of India of year 2001 (CPCB,  
206 2006). Various control strategies have been introduced in the last few years (CPCB, 2010b). In the  
207 recent past, government/ regulatory agencies have taken various measures to curb emissions from  
208 motor vehicles (Gulia et al., 2015). Various recommendations from Auto Fuel Policy (MoPNG,  
209 2003) have been adopted for reduction of vehicular pollution through enhancing better engine  
210 technology, fuel quality and reducing related emissions, alternative fuels, the introduction of  
211 Bharat Stage (BS) Norms (equivalent to EURO standards), restriction/ban on diesel/petrol vehicles  
212 older than 10 and 15 years, respectively; mandatory use of clean fuel (CNG/LNG) in commercial  
213 and public transport; restrictions on movements of heavy vehicles in the city during daytime;  
214 declaration of *low emission zones*; road space rationing etc. Recently, GoI has decided to leapfrog  
215 to BS VI norms in 2020 from BS IV with an amendment in Central Motor Vehicles Rule, 1989  
216 (MoRTH, 2016). In year 2015, due to deteriorating air quality in Delhi, emergency measures were  
217 undertaken. The Honourable Supreme Court of India banned the registration of  $\geq 2000$ cc diesel  
218 vehicles in Delhi which was revoked with an additional 1% environmental levy on the purchase  
219 of such vehicles. In another such emergency measure to improve air quality in Delhi, rationing of  
220 private cars was carried out on the basis of the registration number of vehicles i.e. vehicles with  
221 odd registration permitted on odd date and vehicle with an even registered number permitted on

222 even date (Kumar et al., 2017). Recently, the Ministry of Environment, Forest and Climate Change  
 223 has notified a *Graded Response Action Plan (GRAP)* to tackle air pollution episodes in Delhi NCR  
 224 region in January 2017 (MoEF&CC, 2017). However, the efficacy/potential of this *GRAP* in  
 225 reducing the ambient pollution levels still needs to be assessed scientifically. In addition,  
 226 establishment of a National Green Tribunal (NGT) at the National Level and creation of an  
 227 Environmental Pollution Control Authority (EPCA) in Delhi-NCR, are some important steps taken  
 228 by the Indian government in order to manage increasing ambient air pollution. In spite of the above  
 229 actions, the air pollution in Indian cities like Delhi is still exceeding the specified standards.

230

231 4.0 Urban air quality management related to vehicular emission in developed countries

232 Urban air quality in cities of developed countries is showing signs of improvement, apparently due  
 233 to implementation of the urban air pollution management plans. In Europe, the emission reduction  
 234 from vehicular exhausts from year 1990 to year 2009 has been reported to be around 54% for SO<sub>2</sub>,  
 235 27% for NO<sub>x</sub>, 16% for PM<sub>10</sub> and 21% for PM<sub>2.5</sub> (EEA, 2011). In North American megacities like  
 236 Los Angeles, New York, and Mexico City, the pollutant concentrations for some criteria pollutants  
 237 have shown declining trends, particularly in tropospheric ozone (O<sub>3</sub>). However, at some designated  
 238 non-attainment areas, national ambient air quality standards are still exceeded (Parrish et al., 2011).  
 239 In New South Wales (NSW) in Australia, one-hourly average NO<sub>2</sub> concentrations have shown a  
 240 declining trend from 1980 to 2009, which may be due to the implementation of cleaner fuel  
 241 standards (NSW Government, 2010).

242 In the UK, urban air quality management strategies are implemented and regularly monitored at  
 243 specially designated Air Quality Management Areas (AQMAs) (DEFRA, 2016). Some successful  
 244 urban air quality management programmes which appear to have reduced pollution levels are  
 245 described in Table 1.

246 Table 1: Urban air quality management programmes in different cities/countries

City/ Country	Management Practices	Impact on Air Quality	Reference
London/England	Congestion and road user charging	Significantly reduced CO <sub>2</sub> , NO <sub>x</sub> and PM <sub>10</sub> concentrations by 16.4%, 13.4%, and 6.9%, respectively which further improve health benefit	EEA, 2008
USA	Vehicular exhaust emission control	PM <sub>2.5</sub> emissions has reduced by 24% and 21% in Los Angeles and Rubidoux, respectively from year 2002 to year 2012	Hasheminassab et al., 2014
USA	State Implementation Plan (SIP)	Efficient and effective SIP in a region of Connecticut, Georgia, Illinois, Indiana, Kentucky, Maryland,	Cohan and Chen, 2014

---

		Michigan, Missouri, New Jersey, New York, North Carolina, Ohio, Pennsylvania, Tennessee and West Virginia and the District of Columbia has helped in achieving the goal of bringing down the concentrations of PM <sub>2.5</sub> within the prescribed standards	
Barcelona, Spain	Improvement in Traffic Fleet	Significantly reduced ambient concentrations of NO <sub>2</sub> and PM <sub>10</sub> concentration	Soret et al., 2013
Mexico City	Low-emitting vehicles and Bus Rapid Transit	Significantly reduced urban air pollution levels	Baeza and Pardo, 2014

---

247

248 The cited examples clearly show definite benefits of implemented management practices that have  
 249 improved urban air quality. Further, an effective and efficient air quality management framework  
 250 requires interconnectivity between its various components. In the UK, following LAQM  
 251 regulatory guidelines, AQMAs are first identified based on areas exceeding the national air quality  
 252 objectives. Air Quality Action Plans are then implemented to improve ambient air quality in the  
 253 designated area. Looking at the increasing urbanization globally especially in developing  
 254 countries, there is an urgent need to equip air quality regulatory authorities with an effective and  
 255 efficient ULAQM framework. The framework must consist of interconnected components such as  
 256 air quality standards/limits for all criteria and hazardous air pollutants; a continuous real-time air  
 257 quality monitoring network along with screen display systems; an efficient comprehensive and  
 258 updated emission inventory (e.g. online source emission inventory or e-inventory); air quality  
 259 modelling (able to capture episodic conditions and also chemically reactive species) and control  
 260 practices (based on their efficacy in reducing pollution level, socio-economic feasibility) and  
 261 public participation (starting from goal setting to decision making).

262

## 263 5. Development and formulation of ULAQM framework

264 The urban air quality management practices are country specific, based on priorities agreed for a  
 265 specific AQMAs to maintain acceptable ambient air quality, and are implemented and enforced  
 266 through legislative laws (Longhurst et al., 1996). The key components of ULAQM are air quality  
 267 objectives, monitoring, emission inventory, prediction and forecasting tools, control strategies and  
 268 public participation. Further, each component plays a significant role in improving the efficiency  
 269 of the ULAQM, thus reducing pollutant concentrations. The effective and efficient implementation  
 270 of ULAQM in developing countries still remains a challenging task for air quality managers due  
 271 to lack of government commitments and stakeholder participation, weaknesses in policies,  
 272 standards and regulations, lack of real-time air quality data and emission inventories (Naiker et al.,  
 273 2012). The management practices to improve urban air quality are very limited, and the portion of

274 the budget allocated for urban air quality management is insufficient especially in developing  
 275 countries. Kura et al. (2013) have analysed urban air pollution problems in China, India and Brazil  
 276 at a macro urban scale and proposed a system based methodology to develop the UAQM that takes  
 277 into account: (i) identification of critical pollutants and their sources, (ii) setting up of the air  
 278 quality monitoring network, (iii) development of emission inventories, (iv) source prioritization,  
 279 (v) control strategies and (vi) development of decision support system. The comparative  
 280 description of air quality management frameworks developed by researchers and/or adopted by  
 281 governments to tackle increasing urban air pollution are presented in Table 2.

282 Table 2: Comparative review of selected air quality management frameworks

Parameters	Air quality management framework				
	LAQM	SIP	AQMS	AQMP	e-UAQMP
Country	UK	USA	Suggested for Developing Countries*	South Africa	-
Identification of Area	AQMA declaration by local authority	AQCR declaration by central agency	-	-	AQCR
Goal Setting	Long & short term objectives	Long term/national level	Long term/national level	Long term/national level	Short term / episodic/ Area specific
Air quality assessment	X	X	X	X	X
Source apportionment	X	-	-	-	-
Emission inventory	X	X	X	X	X
Air Quality Modelling	(Screening or detailed dispersion modelling)	Gaussian dispersion model	Gaussian dispersion model	Gaussian dispersion model	Hybrid model (Statistical distribution – Gaussian dispersion model)
Health Exposure Assessment	-	-	X	-	-
Short term control measure	-	-	-	-	Alert/warning/emergency
Long term control measures	X	X	X	X	X



Evaluation	X	X	-	X	X (Evaluation & re-evaluation)
Public Consultation/ Participation	X (Consultation from goal setting to implementation but Public Participation not essential )	X	X	X (Consultation in goal setting and baseline setup)	-
Policy Making	X	X	-	X	X
Responsibility	Local authority through Policy and Technical Guidance	Local authority	National agency	National agency	Urban development authority
Time frame to implement actions	-	3 year after AQCR declaration	-	-	-
Reference	Longhurst et al. (1996); DEFRA (2016)	NRC (2004)	Steinar et al. (1997)	DEAT (2008)	Gokhale and Khare (2007)

283 ‘-’ not part of framework; ‘X’ part of framework

284 By analysing and understanding the strength and limitations of existing urban air quality  
285 management frameworks as described in Table 2, the present ULAQM framework has been  
286 formulated and tested theoretically to manage increasing air pollution at specified urban locations  
287 in Indian cities. The ULAQM framework incorporates almost all required functionality of an  
288 efficient and effective management plan enabling decision makers to deliberate upon the policies  
289 needed for managing the local air quality problems including episodic conditions. The ULAQM  
290 is different to other existing air quality management frameworks with the exception that it can also  
291 deal with *extreme* pollutant concentrations. Figure 1 shows the ULAQM framework with a  
292 description of its key components. The importance and functionality of each key components are  
293 described below followed by example case studies. The present ULAQM framework is targeted at  
294 controlling ambient NO<sub>x</sub> and PM<sub>2.5</sub> concentrations at selected NAAs in Delhi and Chennai cities,  
295 respectively.

### 296 5.1 Goals of the ULAQM framework

297  
298 The primary goal of the ULAQM framework is to attain or maintain 24-hour as well as hourly  
299 average NO<sub>x</sub> and PM<sub>2.5</sub> concentrations within specified standards at selected NAAs. In India,  
300 NAAQS for NO<sub>x</sub> and PM<sub>2.5</sub> are available only for annual and 24-hour average concentrations

301 (Table 3). However, it is also important to assess hourly average concentrations of air pollutants  
 302 to effectively and efficiently manage short-term exceedences of these pollutants that are likely to  
 303 have an acute effect on human health. Therefore, WHO guidelines of 200  $\mu\text{g}/\text{m}^3$  hourly average  
 304 have been used for analysing exceedences of  $\text{NO}_x$  (WHO, 2005) and, for  $\text{PM}_{2.5}$ , the Canadian  
 305 standard, which is 80  $\mu\text{g}/\text{m}^3$ , has been used (Gulia et al., 2017a; Fu et al., 2000; DEQ Idaho, 2001).

306

307

Table 3: Ambient air quality standards/guidelines

<b>Pollutants</b>	<b>Annual average*</b>	<b>24 hour average**</b>	<b>1 hour average</b>
<b><math>\text{NO}_x</math> (<math>\mu\text{g}/\text{m}^3</math>)</b>	60	80	200 <sup>#</sup>
<b><math>\text{PM}_{2.5}</math> (<math>\mu\text{g}/\text{m}^3</math>)</b>	40	60	80 <sup>##</sup>


308 \* Annual arithmetic mean of minimum 104 measurements in a year taken twice a week 24 hourly at uniform  
 309 interval (MoEF&CC, 2009)

310 \*\* 24-hourly/8-hourly values should be met 98% of the time in a year. However, 2% of the time, it may exceed  
 311 but not on two consecutive days.

312 <sup>#</sup> WHO, (2005)

313 <sup>##</sup> Fu et al. (2000); DEQ Idaho (2001)

314

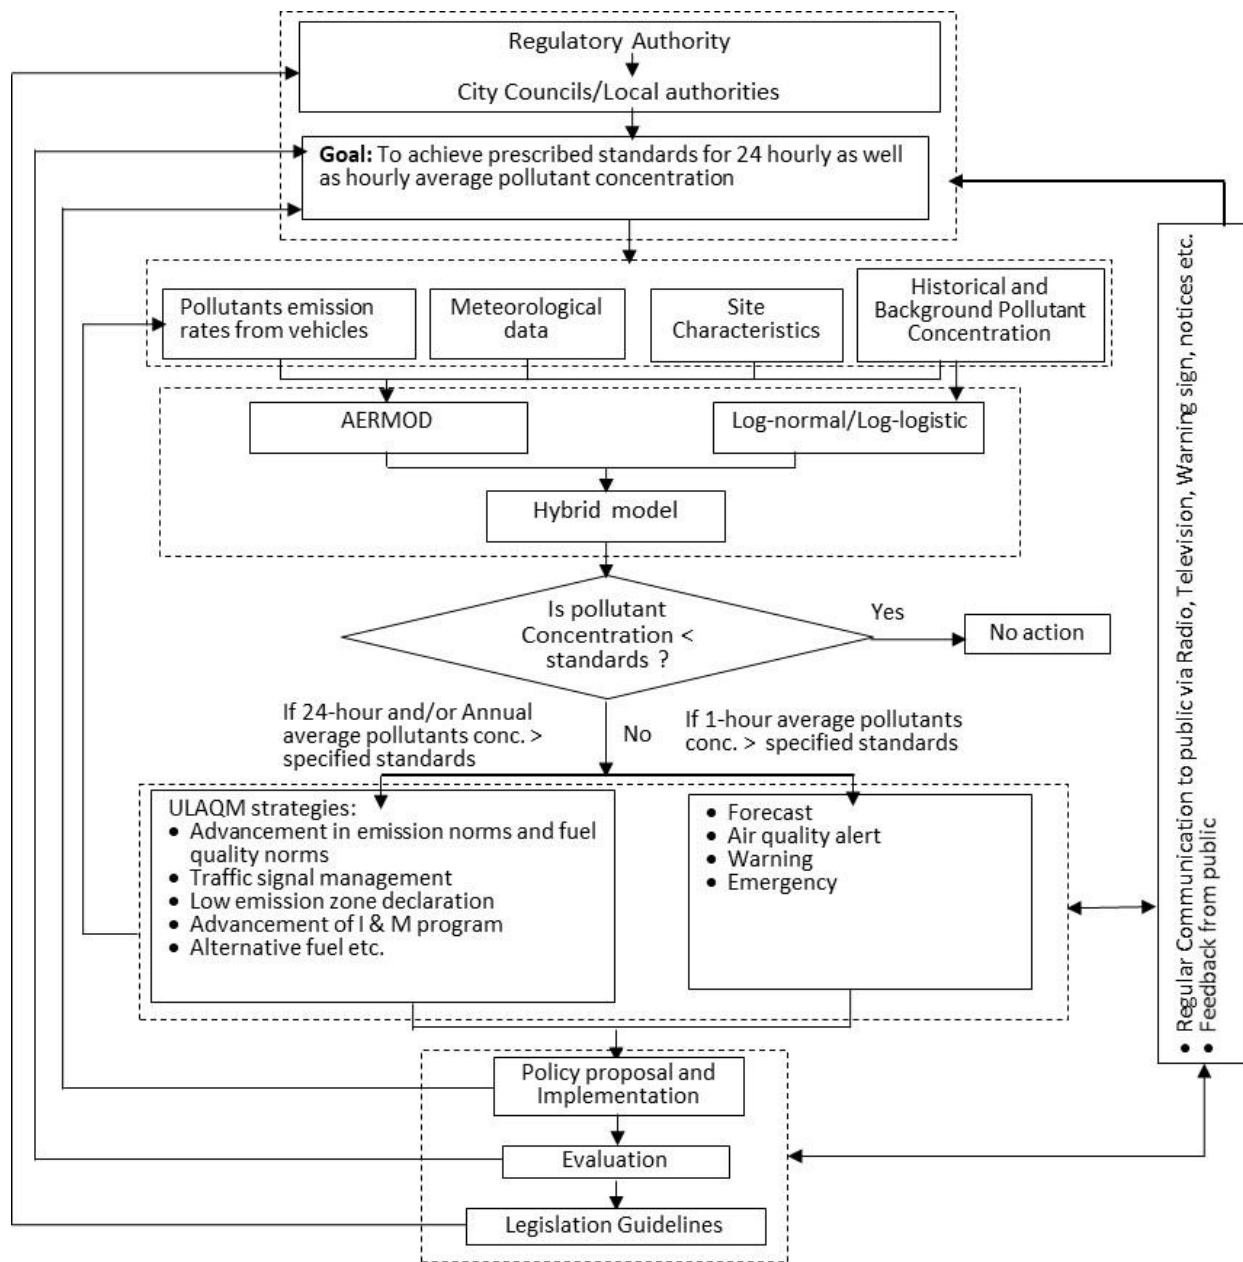

315

316

Figure 1: ULAQM framework

317 5.2 Air quality monitoring

318

319 Ambient air quality monitoring is an important aspect of ULAQM which assesses the current air  
 320 quality status as well as evaluates existing policies. Air quality monitoring is used to identify and  
 321 declare the NAAs by comparing pollutant concentrations with standards. The protocol for ambient  
 322 air quality monitoring including real time continuous monitoring, has already been developed by  
 323 CPCB (2011). Real time continuous monitoring is essential to analyse the temporal variations of  
 324 pollutant concentrations within the NAAs, especially during air pollution episodes. In addition,  
 325 quality assurance/quality control protocols are also required including specifications for

326 operation/maintenance of a monitoring network. The ULAQM framework also supports the use of  
 327 a low-cost sensor based wireless air quality monitoring network for Indian cities. This kind of air  
 328 quality monitoring network provides *indicative* high-resolution spatial data throughout the city at  
 329 very low cost, which is one of the important concerns for policy makers in developing countries  
 330 including India (Kumar et al., 2015b). High spatial resolution of air quality monitoring data is  
 331 required because of the high spatial variation of emission sources and urban structures (unplanned  
 332 and heterogeneous growth). This will strengthen the management plan in identifying the NAA  
 333 areas and assist in evolving early hazard warnings to protect receptors from high ambient air  
 334 pollution levels. However, their robustness in measuring pollutant concentration must be evaluated  
 335 before their deployment. ULAQM also suggests capacity building of city councils/local authorities  
 336 to measure ambient air quality and inform/recommend the regulatory authorities (statutory bodies)  
 337 to initiate the actions if the concentrations exceeding the NAAQS.

### 338 5.3 Emission estimates

339

340 Estimation of emission rates from vehicle exhaust is the first step in the development of  
 341 control strategies and a key component of ULAQM. It is directly proportional to pollutant  
 342 concentrations at the receptor point. Further, qualitative and quantitative estimation of emissions  
 343 from heterogeneous vehicle exhaust depends mainly on traffic volume, traffic fleet characteristics,  
 344 vintage of vehicles, engine type, fuel adulteration and driver behaviour. A comprehensive, robust  
 345 emission inventory seems to be the basis for selection of control strategies whose efficacy can be  
 346 evaluated using an air quality model. In the present case study, emission rates have been estimated  
 347 using a bottom-up approach (as defined in equations 1 & 2) for vehicles exhaust and re-suspension  
 348 of road dust, respectively (Gulia et al., 2015b; ARAI, 2007; Amato et al., 2014; USEPA, 2011).  
 349 The ARAI, 2007 published emission factors for Indian vehicles are developed based on average  
 350 vehicle speed using Indian driving cycle, however, vehicle's speed is varying on real time traffic  
 351 situation at different urban road conditions. Therefore, speed dependent emission factors need to  
 352 be developed for Indian vehicles and basis emission inventory should be updated for accurate  
 353 estimation of pollution load.

$$354 \quad ER(i) = \sum(j) N(j, k) \times EF(i, j, k) \times DF(i, j, k) \times L \quad (1)$$

355 where,

356 ER(i) = Emissions rate of pollutant 'i'

357 N(j, k) = Number of vehicles of a particular type 'j' and age of vehicle 'k'

358 EF(i, j, k) = Emission factor for pollutant 'i' in the vehicle type 'j' and age 'k' (gm km<sup>-1</sup>)

359 DF(i, j, k) = Deterioration factor for pollutant 'i' in the vehicle type 'j' and age 'k'

360 j = Type of vehicle (2W-2S & 4S, 3W-Petrol, Diesel & CNG driven, 4W -Petrol, Diesel & CNG  
 361 driven, Bus, Truck)

362 L = Road length (m)

363

$$364 \quad E = k \times (sL)^{0.91} \times (W)^{1.02} \quad (2)$$

365 where,

366 E = particulate emission factor (g/VKT)

367 k = particle size multiplier (g/VKT), default value of "k" for PM<sub>2.5</sub> is 0.15 g/VKT

368 sL = road surface silt loading rate (g/m<sup>2</sup>)

369 W = Average weight of vehicles (in tons) on road  
370

#### 371 5.4 Meteorological data 372

373 Prevailing meteorological conditions strongly influence the dispersion of air pollutant and play an  
374 important role in pollutant transport from source to receptor. The meteorological conditions  
375 depend on geographical location and local topography. Calm wind and significant emission  
376 sources are responsible for the occurrence of air pollution episodes. Therefore, monitoring and  
377 forecasting of meteorological parameters are important to predict pollutant concentrations during  
378 an episode. Air quality models need sufficient hourly average meteorological data, both temporally  
379 and spatially at the surface as well as upper air. Hourly average data of wind speed (m/s), wind  
380 direction (degree), cloud cover (tens), temperature ( $^{\circ}\text{C}$ ), relative humidity (%), atmospheric  
381 pressure (mbar), precipitation (cm), global solar radiation ( $\text{Wh m}^{-2}$ ) and ceiling height (m) are  
382 required for air quality monitoring. In addition, the upper air sounding data includes atmospheric  
383 pressure (mbar), height (m), temperature ( $^{\circ}\text{C}$ ), relative humidity (%), wind direction (degree) and  
384 wind speed (m/s). Therefore, availability of these surface and upper air data for Indian conditions  
385 will be very useful for accurate predication of air pollutant concentrations.

#### 386 5.5 Air Quality Modelling 387

388 Air quality modelling is the most important component of the ULAQM framework which predicts  
389 current as well as future air quality in order to enable informed policy decisions to be made. The  
390 ULAQM also predicts the occurrence of extreme pollutant concentrations during episodic  
391 condition. The ULAQM uses the hybrid model i.e. a combination of Gaussian dispersion and  
392 statistical distribution model to predict air pollutant concentrations and to evaluate the scenarios,  
393 especially during episodic conditions. The hybrid model predicts *average* as well as *extreme*  
394 pollutant concentrations satisfactorily (Gokhale and Khare, 2005; Sharma et al., 2013b; Gulia et  
395 al., 2017b). In the resent case study, the hybrid model has been developed by combining AERMOD  
396 (Gulia et al., 2017; Gulia et al., 2015b; Khare et al., 2012) and Lognormal/Log-logistic statistical  
397 distribution model to predict *averages* as well as *extreme* percentile ranges of pollutant  
398 concentrations at two selected urban locations (Gulia et al., 2017b). The developed hybrid model  
399 (AERMOD-Lognormal) predicts  $\text{NO}_x$  and  $\text{PM}_{2.5}$  concentrations satisfactorily with index of  
400 agreement 'd' value of more than 0.95 during the winter season at selected locations in Delhi and  
401 Chennai cities, respectively. Further, the hybrid model has been used to simulate pollutant  
402 concentrations under different management/control option scenarios.

403

#### 404 5.6 ULAQM strategies 405

406 This is the first step of ULAQM framework to reduce pollutant emissions from source to improve  
407 air quality for both long-term as well as short-term (i.e. episodic conditions). These control  
408 strategies are evaluated for their efficacy, technical feasibility, implementation period, requirement

409 of financial resources and social feasibility before adopting them directly. The control strategies  
 410 need to be evaluated quantitatively in order to assess their effect on pollution levels. Gulia et al.  
 411 (2015a) have comprehensively reviewed these control strategies.

412 The framework formulates a robust Emergency Response Plan (ERP), which works under the  
 413 umbrella of ULAQM to manage and prevent air pollution episodes. The ultimate objective of ERP  
 414 is to reduce emissions during *episodes* and avoid public exposure to high pollutant concentrations.  
 415 The ERP works in *four* steps. The first step is the *forecast* of pollutant concentrations using the  
 416 hybrid model; second, the *alert*, when pollutant concentration exceeds the specified standard up to  
 417 two times; third, the *warning*, which primarily indicates that air quality continues to deteriorate  
 418 and additional control actions are needed; and fourth, the *emergency*, at which a substantial  
 419 endangerment to human health is expected. Table 4 describes the criteria for declaration of an  
 420 episode based on hourly average concentrations which may further improved based on health  
 421 adversary. For 24-hour average concentrations, the criteria defined under recently notified *Graded*  
 422 *Response Action Plan* (GRAP) by MoEF & CC, can be used to *forecast alert*, *warning* and  
 423 *emergency* conditions for AQI categories of *moderate*, *poor*, *very poor* and *severe*, respectively  
 424 (MoEF & CC, 2017).

425 Table 4: Criteria for declaration of an episode based on hourly average air pollutant  
 426 concentrations

ERP stage	Criteria
<b>Forecast</b>	Possibility of a high air pollution potential in next few hours/days based on meteorological forecasting and air quality modelling result. 1-hr. average NO <sub>x</sub> : $\geq 200 \mu\text{g}/\text{m}^3$ 1-hr. average PM <sub>2.5</sub> : $\geq 80 \mu\text{g}/\text{m}^3$
<b>Alert</b>	1-hr average NO <sub>x</sub> : 201-400 $\mu\text{g}/\text{m}^3$ 1-hr average PM <sub>2.5</sub> : 81- 160 $\mu\text{g}/\text{m}^3$
<b>Warning</b>	1-hr average NO <sub>x</sub> : 401-600 $\mu\text{g}/\text{m}^3$ 1-hr average PM <sub>2.5</sub> : 161-240 $\mu\text{g}/\text{m}^3$
<b>Emergency</b>	1-hr average NO <sub>x</sub> : $> 600 \mu\text{g}/\text{m}^3$ 1-hr average PM <sub>2.5</sub> : $> 240 \mu\text{g}/\text{m}^3$

427  
 428 In order to operate the ERP, it is proposed to establish an Emergency Response Centre (ERC),  
 429 which may be an agency of existing pollution control authorities. The ERC may include a team of  
 430 experts such as meteorologists, air quality modellers, transport planners, communication  
 431 engineers, health experts and a coordinator. Further, it may serve as the interface between the  
 432 policy makers and the pollution control authorities. The ERC operates in three different modes, i)  
 433 routine surveillance (between air pollution episodes to check major activities); partial activation  
 434 (during forecast and alert level) and full activation (during warning and emergency).

435 Once the *episode* is declared, emergency response strategies are implemented to reduce the  
 436 pollutant emission rates. The emergency response strategies are integrated, pre-planned groups of

437 emission reduction actions that are available to the ERC for *episode* avoidance. The mitigation  
438 strategies should be selected based on their relative contribution to pollution, potential to reduce  
439 emission rates, the time required for emission reduction and socio-economic impacts. The ERC  
440 must also have an effective public information program.

#### 441 5.7 Public participation

442

443 The public plays an influential role in formulating ULAQM as the management activities impact  
444 them by influencing their activities and expectations. Public participation is not only limited to  
445 sharing timely information regarding air quality (e.g. good or bad), but also involves them actively  
446 throughout the formulation of a management plan, i.e. from goal setting to policy implementation.  
447 A well-planned information dissemination system serviced by efficient communication is essential  
448 for management of an air pollution episode. The effectiveness of the ERP depends upon rapid and  
449 accurate transmission of information from the surveillance equipment to the ERC and related  
450 abatement instructions from the ERC to the emitters. This process of communication is reversible.  
451 Most of the information transmits to the public through the news media in a standard format:  
452 information regarding the duration and intensity of the episode, health precautions and other  
453 aspects of episode disseminates through a variety of techniques (SI Table S2). The information  
454 system operates in three phases, i.e., *before* the episode, *during* an episode and *following* an  
455 episode. ERC prepares an effective episode information plan *before* the episode and it will be  
456 enacted *during* the episode for activation; *after* an episode, it serves to audit the activities. All the  
457 information during the episode is to be reported in a proper format for legal purposes and to provide  
458 more effective actions to control future episodes.

459

#### 460 5.8 Policy proposal and its implementation

461

462 Once the control strategies are evaluated, all the actions plan/responses are put together to make a  
463 policy for that particular NAA. Policymaking must be an agreed procedure by which air quality  
464 goals are progressively achieved across a specified period, i.e., long-term as well as short-term.  
465 The long timescale means that the land use and transport plans for a local authority can be  
466 integrated with the ULAQM and the projected outcomes of the land use and transport plans tested  
467 within its framework. The developed policy needs an implementation plan for these site-specific  
468 ULAQM. The public must be consulted throughout policy development and implementation  
469 through awareness programs and proper communication systems (SI Table S2). Continuous  
470 capacity building and training programs may be organised to identify needs and knowledge gaps  
471 in ULAQM.

#### 472 5.9 Evaluation

473

474 It is also an important component of any management practice to fill the gaps in the system. It is  
475 necessary to check the working of a management plan to ensure continued consistency with other  
476 policies. The framework acts as a decision support system (DSS) for policy makers and regulators

477 for effective and efficient urban air quality management at NAAs. It provides scientifically sound  
478 information on emission sources, meteorological conditions, predicted pollutant concentrations,  
479 frequency of violations of standards and control strategies (Elbir et al., 1997).

480

## 481 **6.0 Evaluation of ULAQM framework**


482 The developed ULAQM framework has been evaluated for two selected NAAs in Delhi (NAA1)  
483 and Chennai (NAA2) cities during the winter period for NO<sub>x</sub> and PM<sub>2.5</sub>, respectively.

484

### 485 6.1 At ITO intersection, Delhi (NAA1): NO<sub>x</sub> control

486 The ITO intersection is one of the busiest traffic intersections in Delhi (Gulia et al., 2017b; Mohan  
487 and Kandya, 2007), and surrounded by densely populated commercial and residential areas. Four  
488 major roads meet at this intersection, namely, *Road 1*: Dean Dayal Upadhaya Marg (DDU, towards  
489 West); *Road 2 & 4*: Bahadur Shah Zafar Marg (BSZ, towards North and South, respectively) and  
490 *Road 3*: Inderaprastha Marg (IP, towards East). The ambient monitoring station is located at a  
491 distance of 12 metres from Road 2 (Figure 2). Approximately, 0.23 million vehicles per day cross  
492 this intersection. Past studies (Goyal et al., 2010; Pant et al., 2015; Sindhwani et al., 2015) have  
493 reported frequent violations of NAAQS, particularly during winter periods and it has been reported  
494 as one of the urban *hotspots* for air pollution in Delhi city. Historical NO<sub>x</sub> concentration monitoring  
495 data is taken from the CPCB monitoring station at NAA1 for 2009-2010 and the traffic data from  
496 the Central Road Research Institute for 2010. These data have been used to estimate the NO<sub>x</sub>  
497 emission rate. The site features are obtained from a field survey. The details of input parameters  
498 for the hybrid model development are described in SI Table S3.



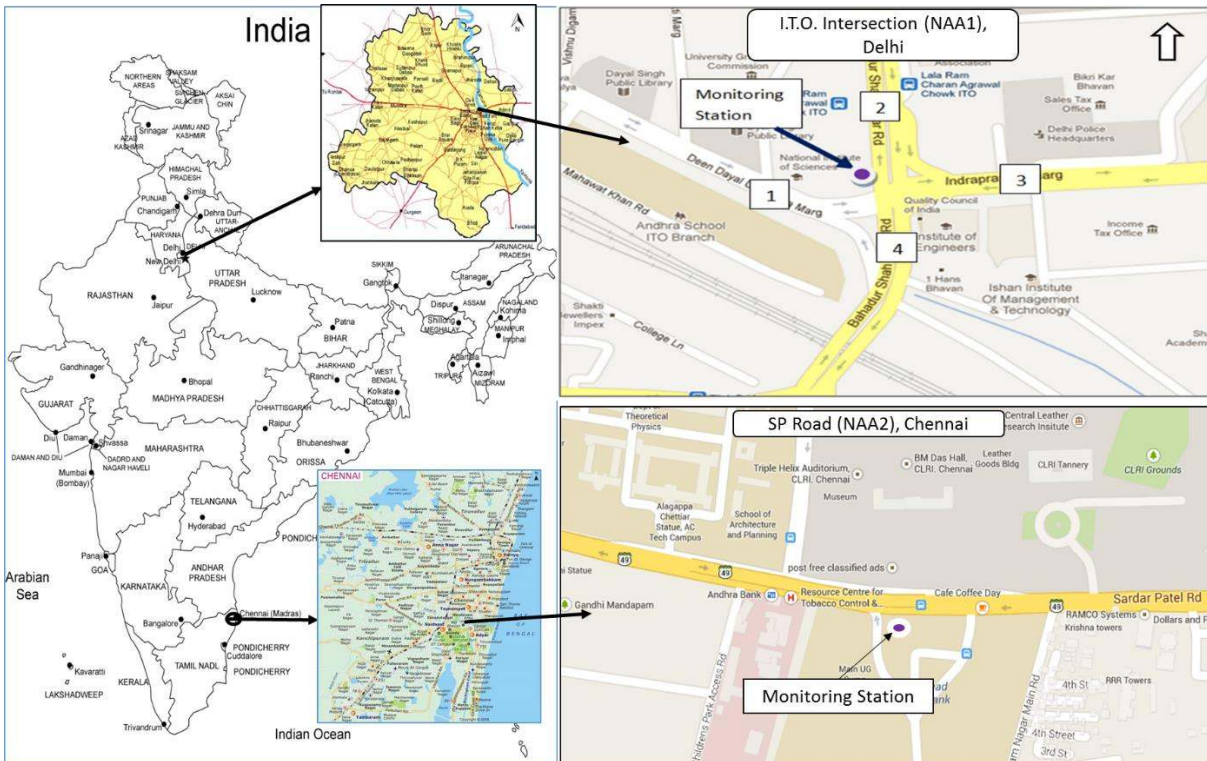

499

500 (Gulia et al., 2017a)

501

Figure 2: Map showing NAA1 and NAA2

502

503 The hybrid model i.e. AERMOD-Lognormal, performs satisfactorily in predicting NO<sub>x</sub>  
 504 concentration at NAA1 having an index of agreement (d) value greater than 0.95 (Gulia et al.  
 505 2017b). The AERMOD-Lognormal hybrid model has been applied to evaluate the impact of traffic  
 506 management strategies to reduce NO<sub>x</sub> concentration levels at NAA1 (Table 5).

507 **Scenario #1:** This scenario suggests restriction of LCVs and HCVs within the NAA1 during *peak*  
 508 traffic hours i.e. 09:00 – 11:00 and 18:00 – 21:00. Additionally, an odd-even car scheme applied  
 509 to all private and commercial cars which may reduce about 50% of the total 4W at NAA1. The  
 510 entry of *inter-state* buses through NAA1 is also not allowed. It is assumed that 50% of the total  
 511 *city buses* are plying during peak hours.

512 **Scenario #2:** This scenario suggests restriction on the entry of LCVs, HCVs and buses within the  
 513 NAA1 during *peak* traffic hours i.e. 09:00 – 11:00 and 18:00 – 21:00.

514 **Scenario #3:** This scenario suggests enforcement of congestion charges on vehicles passing  
 515 through NAA1. It is assumed that this traffic strategy will reduce 50% of total 2W, 3W and 4W at  
 516 NAA1. To compensate this reduction in traffic, the volume of buses are estimated and assumed to  
 517 ply through NAA1. Therefore, buses volume is increased by 6%, i.e. 499 buses. The HCVs are not  
 518 allowed to enter any time while LCVs are allowed to enter NAA1 during non-peak hours.

519

520

Table 5: Traffic management strategies at NAA1

Types of Vehicle	Traffic volume (% age)			
	Base case	Scenario1	Scenario 2	Scenario 3
<b>2W</b>	37	37	37	18.5
<b>3W</b>	18	18	18	9
<b>4W</b>	40	20	40	20
<b>LCV</b>	2	0*	0*	0*
<b>HCV</b>	2	0*	0*	0
<b>Bus</b>	1	0.5	0*	1.06
<b>Total</b>	100	71.5	95	48.56

521 \*During peak traffic hours only

522

523 Table 6 describes results of these three scenarios in the reduction of NO<sub>x</sub> concentrations at NAA1.  
 524 It is observed that traffic management strategies in scenarios 1 and 3 have efficiently reduced NO<sub>x</sub>  
 525 concentration in line with WHO guidelines.

526

Table 6: Scenario evaluation at NAA1

Sr. no.	Item	Descriptions		
<b>1</b>	Hybrid model*	AERMOD-Lognormal		
<b>2</b>	Parameter estimation	Location ( $\mu$ )		Scale ( $\sigma$ )
<b>2.1</b>	Base case	4.201		0.858
<b>2.2</b>	Scenario1	3.459		0.6796
<b>2.3</b>	Scenario2	4.124		0.8664
<b>2.4</b>	Scenario 3	3.465		0.5624
<b>3</b>	Hybrid model output	Probability ( $x \leq 200$ $\mu\text{g}/\text{m}^3$ ) (%)	Probability ( $x \geq 200$ $\mu\text{g}/\text{m}^3$ ) (%)	WHO_AQG criteria being met or not (Yes /No)
<b>3.1</b>	Base case	89.95	10.05	NO
<b>3.2</b>	Scenario1	99.66	0.34	Yes
<b>3.3</b>	Scenario2	91.24	8.76	NO
<b>3.4</b>	Scenario 3	99.94	0.06	Yes

527 (\*Gulia et al. 2017b)

528

529 6.2 At SP road, Chennai (NAA2): PM<sub>2.5</sub> control

530 The SP road is one of the busiest road corridors in Chennai city and surrounded by densely  
 531 populated institutional and residential areas (Figure 2). The traffic density on NAA2 is  
 532 approximately 0.17 and 0.14 million vehicles per day during weekdays and weekends,  
 533 respectively. Frequent violations of NAAQS have been observed (Srimuruganandam and

534 Nagendra, 2011). The monitoring station is located on the kerbside of SP road (in the southbound  
 535 direction from SP road) near IIT Madras main entrance gate. Historical PM<sub>2.5</sub> concentration data  
 536 (2008-2009) has been collected by the air quality laboratory of IIT Madras. The traffic volume and  
 537 fleet characteristics data of the SP road for the study period and the site features were collected  
 538 from field surveys.

539 The hybrid model, AERMOD-Lognormal, performs satisfactorily in predicting PM<sub>2.5</sub>  
 540 concentrations at NAA2 having the index of agreement (d) value greater than 0.90 (Gulia et al.  
 541 2017b). The AERMOD-Lognormal hybrid model has been applied to evaluate the impact of traffic  
 542 management strategies to reduce PM<sub>2.5</sub> concentration levels at NAA2. The traffic management  
 543 strategies are described in Table 7.

544 **Scenario #1:** In this scenario, only 80% of 2W, 3W, 4W and LCVs are allowed to enter through  
 545 NAA2.

546 **Scenario #2:** This scenario suggests that only 60% of traffic (except buses) is allowed to enter  
 547 through NAA2. To compensate this reduction, the volume of buses which is allowed to ply through  
 548 NAA2 is increased by 20%.

549 **Scenario #3:** In this scenario, only 50% of 2W, 3W, 4W and LCVs are allowed to enter through  
 550 NAA2. Additionally, buses are increased by 6%. HCVs are not allowed to enter NAA2 during  
 551 peak traffic hours.

552 Table 7 describes the above scenarios in terms of data which are used as input in application of the  
 553 ULAQM. It is observed that traffic management strategies as selected in all three scenarios are not  
 554 sufficient in reducing the PM<sub>2.5</sub> levels up to specified standards. This clearly indicates that more  
 555 stringent control strategies are needed to be implemented at NAA2.

556 Table 7: Traffic management strategies at NAA2

Types of Vehicle	Traffic fleet (percentage)			
	Base case	Scenario1	Scenario2	Scenario 3
2W	50	40	30	25
3W	6	4.8	3.6	3
4W	35	28	21	17.5
LCV	4	2	2.4	4
HCV	2	1	1.2	0*
Bus	3	3	3.6	3.18
<b>Total</b>	100	78.8	61.8	52.68

557 \*During peak traffic hour

558 Table 8 describes the results of the analysis of the ULAQM incorporating the above scenarios.

559 Table 8: Scenario evaluation at NAA2

Sr. no.	Item	Descriptions
1	Hybrid model*	AERMOD-Lognormal

<b>2</b>	Parameter estimation	Location ( $\mu$ )		Scale ( $\sigma$ )
<b>2.1</b>	Base case	4.093		0.6742
<b>2.2</b>	Scenario1	3.943		0.6336
<b>2.3</b>	Scenario2	3.909		0.593
<b>2.4</b>	Scenario3	3.725		0.5107
<b>3</b>	Hybrid model output	Probability ( $x \leq 80 \mu\text{g}/\text{m}^3$ ) (%)	Probability ( $x \geq 80 \mu\text{g}/\text{m}^3$ ) (%)	Standard met or not (Yes /No)
<b>3.1</b>	Base case	66.59	33.41	NO
<b>3.2</b>	Scenario1	75.58	24.42	NO
<b>3.3</b>	Scenario2	78.75	21.25	NO
<b>3.4</b>	Scenario 3	90.09	9.91	NO

560 (\*Gulia et al., 2017b)

561

562 This ULAQM framework has introduced the concept of urban air quality management at local  
563 level for Indian mega cities having different climatic conditions and heterogeneity in emission  
564 sources. The case study results have also described the efficiency of ULAQM in reduction of  
565 pollutant concentrations at selected NAAs in Indian cities. Following DEFRA, 2017 which  
566 described the implementation of best management practices under LAQM guidelines to improve  
567 air quality in terms of  $\text{NO}_2$  and  $\text{PM}_{10}$  in the designated AQMAs in the UK, the present ULAQM  
568 framework may assist policy makers to develop the ULAQM guidelines for Indian cities.

## 569 **7.0 Conclusion**

570 *Ad hoc* air quality control actions are not sufficient to prevent air pollution episodes in  
571 Indian cities. Additionally, poor communication among policy makers, air quality experts, urban  
572 local bodies (who ensure implementation of policy) and the public (who are affected by the  
573 policies) make air quality management more challenging. In the absence of integrated urban air  
574 quality management policy and increasing concerns of the general public, an ULAQM framework  
575 has been formulated and evaluated for selected NAAs in Delhi and Chennai cities of India. The  
576 role and importance of each key component of the ULAQM have been discussed in detail along  
577 with their inter-connectivity and flow of information.

578

579 The developed ULAQM framework has been applied at NAA1 and NAA2 in Delhi and  
580 Chennai cities, respectively to evaluate it with respect to different scenarios for two criteria  
581 pollutants i.e.  $\text{NO}_x$  and  $\text{PM}_{2.5}$ . The results of the case study examples clearly indicate that ULAQM  
582 framework provides comparative ambient air quality management/control options based on  
583 scenario analysis that can be appropriately chosen and implemented by the concerned air pollution  
584 control authorities to keep the selected air pollutant concentration levels within the specified  
585 standards. Further, the ULAQM framework may also assist policy makers to develop the ULAQM  
586 guidelines for other Indian cities to improve ambient air quality in designated NAAs.

587

588 References

- 589 • Amann M, Purohit P, Bhanarkar AD, Bertok I, Borcken-Kleefeld J, Cofala J, Majumdar D.  
590 Managing future air quality in megacities: A case study for Delhi. *Atmos Environ*, 2017; 161:  
591 99-111.
- 592 • Amato F, Cassee FR, Denier van der Gon HA, Gehrig R, Gustafsson M, Hafner W, Querol  
593 X, Urban air quality: The challenge of traffic non-exhaust emissions. *J Hazard Mater*, 2014;  
594 <http://dxdoiorg/doi:101016/jhazmat201404053>.
- 595 • ARAI. Emission factor development for Indian vehicles. Project report no AEF/2006-  
596 07/IOCL/Emission Factor Project, Automotive Research Association of India, Pune, India;  
597 2017.
- 598 • Badami MG. Transport and urban air pollution in India. *Environ Manage*, 2005; 36: 195–204.
- 599 • Baeza CC, Pardo CS. Sustainable passenger road transport scenarios to reduce fuel  
600 consumption air pollutants and GHG (greenhouse gas) emissions in the Mexico City.  
601 *Metropolitan Area Energy*, 2014; 66: 624-634.
- 602 • Beattie CI, Longhurst JWS, Woodfield NK. Air Quality Action Plans: early indicators of  
603 urban local authority practice in England. *Environ Sci Policy*, 2002; 5: 463–470.
- 604 • Cakmak S, Hebborn C, Cakmak JD, Vanos J. The modifying effect of socioeconomic status  
605 on the relationship between traffic air pollution and respiratory health in elementary school  
606 children. *J of Environ Manage*, 2014; 177: 1-8.
- 607 • Census 2011, Delhi and Chennai City Population. Available at  
608 <http://www.census2011.co.in/census/state/delhi.html>; &  
609 <http://wwwcensus2011coin/census/city/463-chennaihtml>
- 610 • Chelani AB. Study of extreme CO NO<sub>2</sub> and O<sub>3</sub> concentrations at a traffic site in Delhi:  
611 Statistical persistence analysis and source identification. *Aerosol Air Qual Res*, 2013; 13: 377-  
612 384.
- 613 • Cohan DS, Chen R. Modelled and observed fine particulate matter reductions from state  
614 attainment demonstrations. *J Air Waste Manage Assoc*, 2014; 64: 995-1002.
- 615 • CPCB. Air quality trends and action plan for control of air pollution from seventeen studies.  
616 The Central Pollution Control Board, Ministry of Environment and Forest, New Delhi, India,  
617 2009, NAAQMS/29/2006-07.
- 618 • CPCB. Air quality monitoring emission inventory and source apportionment study for Indian  
619 cities. National Summary Report, The Central Pollution Control Board, Ministry of  
620 Environment and Forest, India, 2010a.
- 621 • CPCB. Status of the vehicular pollution control programme in India. The Central Pollution  
622 Control Board, Ministry of Environment and Forest, India, Probes/ 136, 2010b.
- 623 • CPCB. Guidelines for the Measurement of Ambient Air Pollutants VOLUME-II. Central  
624 Pollution Control Board, Ministry of Environment Forest and Climate Change. Available at  
625 <http://cpcbncin/NAAQSManualVolumeIIdf, 2011>.

- 626 • CPCB. Annual Report. Central Pollution Control Board, Govt. of India, New Delhi Available  
627 at [http://cpcbncin/upload/AnnualReports/AnnualReport\\_55\\_Annual\\_Report\\_2014-15pdf](http://cpcbncin/upload/AnnualReports/AnnualReport_55_Annual_Report_2014-15pdf),  
628 2015.
- 629 • DEAT. Manual for air quality management planning. Department of Environmental Affairs  
630 and Tourism, Republic of South Africa, 2008.
- 631 • DEFRA. Part IV of the Environment Act 1995, Local Air Quality Management Policy  
632 Guidance (PG16), Department for Environment Food & Rural Affairs, London UK. Available  
633 at <https://laqmdefragovuk/documents/LAQM-PG16-April-16-v1pdf>, 2016.
- 634 • DEFRA. Good practice examples of the implementation of action plan measures. Department  
635 of Environment Food and Rural Affairs, Available on <[https://laqmdefragovuk/action-](https://laqmdefragovuk/action-planning/case-studieshtml)  
636 [planning/case-studieshtml](https://laqmdefragovuk/action-planning/case-studieshtml)> Accessed on 06 July, 2017.
- 637 • DEQ Idaho. Rule for the control of air pollution in Idaho (IDAPA 580101). Department of  
638 Environment Quality Idaho, USA, 2001.
- 639 • Dhyani R, Sharma N, Maity AK. Prediction of PM<sub>2.5</sub> along urban highway corridor under  
640 mixed traffic conditions using CALINE4 model. *J Environ Manage*, 2017; 198: 24-32.
- 641 • EEA. Laying the foundations for greener transport. Transport indicators tracking progress  
642 towards environmental targets in Europe. Technical Report No.7/2011 European Environment  
643 Agency Copenhagen, 2011.
- 644 • EEA. Success stories within the road transport sector on reducing greenhouse gas emission  
645 and producing ancillary benefits. Technical report No 2/2008, European Environment Agency  
646 Copenhagen, 2008.
- 647 • Elbir T, Muezzinoglu Fedra K. An application of environmental decision support systems  
648 used for air quality management. *Environ Res*, 1997; 7-8: 648-653.
- 649 • Fu L, Hunt K, Myrick B, Aklilu Y. One-hour equivalent of a 24-hour average particulate  
650 matter standard and its potential application in the index of the quality of the air (IQUA).  
651 Presented at the Air and Waste Management Association (AWMA) Conference Banff Alberta,  
652 April 10-12, Available at <https://extranetgovabca/env/infocentre/info/library/6672pdf>, 2000.
- 653 • GoD, Government of Delhi Chapter 12 Transport Economic Survey of Delhi 2014-15.  
654 Available at:  
655 [http://delhigovin/wps/wcm/connect/DoIT\\_Planning/planning/economic+survey+of+dehli/economic+survey+of+delhi+2014+2015](http://delhigovin/wps/wcm/connect/DoIT_Planning/planning/economic+survey+of+dehli/economic+survey+of+delhi+2014+2015) (accessed 27.02. 2016).  
656
- 657 • Gokhale S, Khare M. A hybrid model for predicting carbon monoxide from vehicular exhausts  
658 in urban environments. *Atmos Environ*, 39; 4025–4040.
- 659 • Gokhale S, Khare M. A theoretical framework for the episodic-urban air quality management  
660 plan (e-UAQMP). *Atmos Environ*, 2014, 41: 7887–7894.
- 661 • Gulia S, Nagendra SMS, Khare M, Khanna I. Urban air quality management - A review.  
662 *Atmos Pollut Res*, 2015a; 6: 286-304.

- 663 • Gulia S., Nagendra SMS, Khare M. Comparative evaluation of air quality dispersion models  
664 for PM<sub>2.5</sub> at Air Quality Control Regions in Indian and UK Cities. MAPAN, 2015b; 30: 249-  
665 260
- 666 • Gulia S, Nagendra SS, Khare M. Extreme events of reactive ambient air pollutants and their  
667 distribution pattern at urban hotspots. Aerosol Air Qual Res, 2017a; 17: 394-405.
- 668 • Gulia S, Nagendra SMS, Khare M. A system based approach to develop hybrid model  
669 predicting extreme urban NO<sub>x</sub> and PM<sub>2.5</sub> concentrations. Trans Res Part-D: Trans and  
670 Environ, 2017b; 56C; 141-154.
- 671 • Gupta I, Kumar R. Trends of particulate matter in four cities in India. Atmos Environ, 2006;  
672 40: 2552–2566,
- 673 • Gupta I, Salunkhe A, Kumar R. Modelling 10-year trends of PM<sub>10</sub> and related toxic heavy  
674 metal concentrations in four cities in India. J Hazard Mater, 2010; 179: 1084–1095.
- 675 • Gupta NS. Chennai tops in vehicle density. The Times of India, Available from:  
676 [http://timesofindiaindiatimes.com/business/india-business/Chennai-tops-in-vehicle-](http://timesofindiaindiatimes.com/business/india-business/Chennai-tops-in-vehicle-density/articleshow/47169619cms)  
677 [density/articleshow/47169619cms](http://timesofindiaindiatimes.com/business/india-business/Chennai-tops-in-vehicle-density/articleshow/47169619cms) (accessed 07/06/2015), 2015.
- 678 • Gurjar BR, Ravindra K, Nagpure AS. Air pollution trends over Indian megacities and their  
679 local-to-global implications. Atmos Environ, 2016; 142: 475-495.
- 680 • Gurjar BR, Butler TM, Lawrence MG, Lelieveld J. Evaluation of emissions and air quality in  
681 megacities. Atmos Environ, 2008; 42: 1593–1606.
- 682 • Guttikunda SK, Goel R, Pant P. Nature of air pollution emission sources and management in  
683 the Indian cities. Atmos Environ, 2014; 95: 501-510.
- 684 • Guttikunda SK, Goel R. Health impacts of particulate pollution in a megacity—Delhi India.  
685 Environ Develop, 2013; 6: 8-20.
- 686 • Hasheminassab S, Daher N, Ostro BD, Sioutas C. Long-term source apportionment of ambient  
687 fine particulate matter (PM<sub>2.5</sub>) in the Los Angeles Basin: A focus on emissions reduction from  
688 vehicular sources. Environ Pollut, 2014; 193: 54-64.
- 689 • Hsu A, Zomer A. An Interactive Air-Pollution Map Available on [http://www.epiyaleedu/the-](http://www.epiyaleedu/the-metric/interactive-air-pollution-map)  
690 [metric/interactive-air-pollution-map](http://www.epiyaleedu/the-metric/interactive-air-pollution-map) (accessed 02 March 2016.), 2014.
- 691 • IITM. System of Air Quality and Weather Forecasting and Research (SAFAR). Indian  
692 Institute of Tropical Meteorology Pune. Ministry of Earth Science, Govt. of India. Available  
693 from <http://safartropmetresin/index.php> (accessed on 18 May), 2017.
- 694 • Jayanthi V, Krishnamoorthy R. Key airborne pollutants— impact on human health in Manali  
695 Chennai. Current Sci, 2006; 90: 405–413.
- 696 • Kanlindkar M. Air pollution at a hotspot location in Delhi: Detecting trends seasonal cycles  
697 and oscillations Atmos Environ, 2007; 41: 5934–5947.
- 698 • Kesavachandran CN, Kamal R, Bihari V, Pathak MK, Singh A. Particulate matter in ambient  
699 air and its association with alterations in lung functions and respiratory health problems among  
700 outdoor exercisers in National Capital Region India. Atmos Pollut Res, 2015; 6: 618-625.

- 701 • Khare M, Nagendra SMS, Gulia S. Performance evaluation of air quality dispersion models  
702 at urban intersection of an Indian city: a case study of Delhi city. Proceeding of 20th WIT  
703 international conference on Air Pollution at La Coruna, Spain, 2012; 157: 249-259.
- 704 • Kumar P, Gulia S, Harrison RM, Khare M. The influence of odd–even car trial on fine and  
705 coarse particles in Delhi. *Environ Pollut*, 2017; 225: 20-30.
- 706 • Kumar P, Gurjar BR, Nagpure A, Harrison RM. Preliminary estimates of nanoparticle number  
707 emissions from road vehicles in megacity Delhi and associated health impacts *Environ Sci*  
708 *Technol*, 2011; 45: 5514-5521.
- 709 • Kumar P, Khare M, Harrison RM, Bloss WJ, Lewis AC, Coe H, Morawska L. New directions:  
710 Air pollution challenges for developing megacities like Delhi. *Atmos Environ*, 2015a; 122:  
711 657-661.
- 712 • Kumar P, Morawska L, Martani C, Biskos G, Neophytou M, Di Sabatino S, Britter R. The  
713 rise of low-cost sensing for managing air pollution in cities. *Environ Intern*, 2015b; 75: 199-  
714 205.
- 715 • Kumar P, Saroj DP. Water-energy-pollution nexus for growing cities. *Urban Clim*, 2014; 10:  
716 846–853.
- 717 • Kura B, Verma S, Ajdari E, Iyer A. Growing public health concerns from poor urban air  
718 quality: strategies for sustainable urban living. *Comput Water Energy Environ Engg* 2013; 2:  
719 1-9.
- 720 • Lelieveld J, Evans JS, Fnais M, Giannadaki D, Pozzer A. The contribution of outdoor air  
721 pollution sources to premature mortality on a global scale. *Nature*, 2015; 525: 367-371
- 722 • Li Y, Chang M, Ding S, Wang S, Ni D, Hu H. Monitoring and source apportionment of trace  
723 elements in PM<sub>2.5</sub>: Implications for local air quality management. *J Environ Manage*, 2017;  
724 196: 16-25.
- 725 • Longhurst JWS, Lindley SJ, Watson AFR, Conlan DE. The introduction of local air quality  
726 management in the United Kingdom: A review and theoretical framework. *Atmos Environ*,  
727 1996; 30: 3975-3985.
- 728 • Maji KJ, Dikshit AK, Deshpande A. Disability-adjusted life years and economic cost  
729 assessment of the health effects related to PM<sub>2.5</sub> and PM<sub>10</sub> pollution in Mumbai and Delhi in  
730 India from 1991 to 2015. *Environ Sc and Pollut Res*, 2017; 24: 4709-4730.
- 731 • Mandal P, Saud T, Sarkar R, Mandal A, Sharma SK, Mandal TK, Bassin JK. High seasonal  
732 variation of atmospheric C and particle concentrations in Delhi India. *Environ Chem Lett*,  
733 2014; 12: 225-230.
- 734 • Marlier ME, Jina AS, Kinney PL, DeFries RS. Extreme air pollution in global  
735 megacities. *Current Climate Change Reports*, 2016; 2: 15-27.
- 736 • MoEF&CC. Graded Response Action Plan to combat air pollution in Delhi and National  
737 Capital Region Ministry of Environment Forest and Climate Change Govt of India, 2017.
- 738 • MoEF&CC, National ambient air quality standards Ministry of Environment Forest and  
739 Climate Change New Delhi India Notification number: SO3067 (E) pages 4, 2009.



- 740 • Mohan M, Kandya A. An analysis of the annual and seasonal trends of air quality index of  
741 Delhi. *J Environ Monit Assess*, 2007; 131: 267–277.
- 742 • Molina LT, Kolb CE, Foy B, de Lamb BK, Brune WH, Jimenez JL, Molina MJ. Air quality  
743 in North America’s most populous city – overview of MCMA-2003 Campaign. *J Atmos Chem*  
744 *Phys*, 2007; 7: 2447-2473.
- 745 • MoPNG. Urban road traffic and air pollution study (URTRAP) (2002), Sponsored by Ministry  
746 of Petroleum and Natural Gases (MoPNG) Govt. of India on behalf of Mashelkar Committee,  
747 2003.
- 748 • MoPNG. All India Study on Sectoral Demand of Diesel & Petrol Report Petroleum Planning  
749 and Analysis Cell, Sponsored by Ministry of Petroleum and Natural Gases (MoPNG) Govt of  
750 India, 2013.
- 751 • MoRTH. Ministry of Road Transport and Highways Notification regarding amendment in  
752 Central Motor Vehicles Rule 1988 for shift of fuel from BS-IV to BS VI from 1<sup>st</sup> April 2020  
753 Available on  
754 [http://www.indiaenvironmentportal.org.in/files/file/Mass%20Emission%20Norms%20for%20](http://www.indiaenvironmentportal.org.in/files/file/Mass%20Emission%20Norms%20for%20BS-VI.pdf)  
755 [BS-VI.pdf](http://www.indiaenvironmentportal.org.in/files/file/Mass%20Emission%20Norms%20for%20BS-VI.pdf), 2016.
- 756 • MoRTH. Annual Report-2016-17. Ministry of Road Transport and Highways, Govt. of India,  
757 2017.
- 758 • Moussiopoulos N, Douros I, Tsegas G, Kleanthous S, Chourdakis E. An air quality  
759 management system for Cyprus *Global NEST Journal*, 2010; 12: 92-98.
- 760 • Madala S, Prasad KH, Srinivas CV, Satyanarayana ANV. Air quality simulation of NO X  
761 over the tropical coastal city Chennai in southern India with FLEXPART-WRF. *Atmos*  
762 *Environ*, 2016; 128: 65-81.
- 763 • Naiker Y, Diab RD, Zunckel M, Hayes ET. Introduction of local Air Quality Management in  
764 South Africa: overview and challenges. *Environ Sci Policy*, 2012; 17: 62–71.
- 765 • NCR. National Capital Region Regional Plan Draft Revised Regional Plan 2021. National  
766 Capital Region (Approved in 33rd Meeting of the NCR Planning Board held on 1st July 2013)  
767 July 2013, National Capital Region Planning Board Ministry of Urban Development,  
768 Government of India, 2013.
- 769 • NILU. Air Quality Management Plan for e-Thekwini Municipality Kwa-Zulu Natal South  
770 Africa. Produced by eThekwini Health and Norwegian Institute for Air Research, 2007.
- 771 • NRC. National Research Council report on Air quality management in the United States  
772 ISBN: 978-0-309-08932-6, 2004.
- 773 • NSW. Government Current air quality in New South Wales Australia -a technical paper  
774 supporting the Clean Air Forum, DECCW, 728, 2010.
- 775 • Perrino C, Tiwari S, Catrambone M, Dalla Torre S, Rantica E, Canepari S. Chemical  
776 characterization of atmospheric PM in Delhi, India, during different periods of the year  
777 including Diwali festival. *Atmos Pollut Res*, 2011; 2: 418-427.

- 778 • Pant P, Shukla A, Kohl SD, Chow JC, Watson JG, Harrison RM. Characterization of ambient  
779 PM<sub>2.5</sub> at a pollution hotspot in New Delhi India and inference of sources. *Atmos Environ*,  
780 2015; 109: 178-189.
- 781 • Parrish DD, Singh HB, Molina L, Madronich S. Air quality progress in North American  
782 megacities: A review. *Atmos Environ*, 2011; 45: 7015-7025
- 783 • Ramachandra TV, Shwetmala. Emissions from India's transport sector: State wise synthesis.  
784 *Atmos Environ*, 2009; 43: 5510–5517.
- 785 • Sharma P, Sharma P, Jain S, Kumar P. An integrated statistical approach for evaluating the  
786 exceedence of criteria pollutants in the ambient air of megacity Delhi. *Atmos Environ*, 2013a;  
787 70: 7-17.
- 788 • Sharma S, Sharma P, Khare M. Hybrid modelling approach for effective simulation of reactive  
789 pollutants like Ozone. *Atmos Environ*, 2013b; 80: 408-414.
- 790 • Singh AK, Gupta HK, Gupta K, Singh P, Gupta VB, Sharma RC. A comparative study of  
791 air pollution in Indian cities. *Bullet Environ Conta Toxicol*, 2007; 78: 411–416.
- 792 • Sivaramasundaram K, Muthusubramanian P. A preliminary assessment of PM<sub>10</sub> and TSP  
793 concentrations in Tuticorin India. *Air Qual Atmos Health*, 2010; 3: 95–102.
- 794 • Sivertson B. Air quality management planning for urban Areas around the world. Proceeding  
795 in NACA/IUAPPA Conference South Africa 1 – 3 October, 2008.
- 796 • Soret A, Jimenez-Guerrero P, Andres D, Cardenas F, Rueda S, Baldasano JM. Estimation of  
797 future emission scenarios for analysing the impact of traffic mobility on a large Mediterranean  
798 conurbation in the Barcelona Metropolitan Area (Spain). *Atmos Pollut Res*, 2013; 4: 22-32.
- 799 • Srimuruganandam B, Nagendra SMS. Characteristics of particulate matter and heterogeneous  
800 traffic in the urban area of India. *Atmos Environ*, 2011; 45: 3091-3102.
- 801 • Srimuruganandam B, Nagendra SMS. Source characterization of PM<sub>10</sub> and PM<sub>2.5</sub> mass using  
802 a chemical mass balance model at urban roadside. *Sci of the Total Environ*, 2012; 433: 8-19.
- 803 • Steinar L, Grønskei KE, Hannegraaf MC, Jansen H, Kuik OJ, Oosterhuis FH, Olsthoorn XA,  
804 Jitendra JS, Tanvi N, Carter JB. Urban air quality management strategy in Asia – a Guidebook.  
805 The World Bank Press, 1997.
- 806 • Tiwari S, Bisht DS, Srivastava AK, Pipal AS, Taneja A, Srivastava MK, Attri SD. Variability  
807 in atmospheric particulates and meteorological effects on their mass concentrations over Delhi  
808 India. *Atmos Res*, 2014; 145: 45-56.
- 809 • Tiwari S, Chate DM, Pragya P, Ali K, Bisht DS. Variations in mass of the PM<sub>10</sub>, PM<sub>2.5</sub> and  
810 PM<sub>1</sub> during the monsoon and the winter at New Delhi. *Aerosol and Air Qual Res*, 2012; 12:  
811 20-29.
- 812 • USEPA. Compilation of air pollutant Emission Factors: miscellaneous sources: paved roads  
813 final section. US Environment Protection Agency AP 42 Fifth Ed, 2011.
- 814 • Wang H, Fu L, Zhou L, Du X, Ge W. Trends in vehicular emissions in China's mega cities  
815 from 1995 to 2005. *Environ Pollut*, 2010, 158: 394–400.

- 816 • WHO. WHO Air Quality guidelines for particulate matter ozone nitrogen dioxide and sulphur  
817 dioxide Global update 2005. World Health Organization Geneva, 2005.  
818